

TYRE CHANGER & WHEEL BALANCER

For every professional tyre specialist



TYRE CHANGER PRO RUNFLAT

Art No. 9501006290

- CE Approved
- 1 Phase 220v 50Hz
- Weight: 276 kg
- Motor Performance: 0.37 kw
- Noise level: <70 dB
- Air supply pressure: 8-10bar
- Rim diameter (external clamping): 12" - 26"
- Rim diameter (internal clamping): 15" - 28"
- Max wheel diameter (with tyre): 44"
- Max wheel width (with tyre): 16"

FULLY AUTOMATIC TILTING TYPE WITH HELPER ARM SYSTEM



Patent Design chassis provides strong support for tire changing



Bead breaker adjustable to four different positions



Helper Arm System

Provides 3 points pressing assistance enables an easy operation for low profile tyres as well as run flat tyres



Integrated Power Unit

High-Efficiency Gear Transmission

↑ 20% Turntable Speed

↑ 60% Longer Service Life

↑ 50% Power Saving



↓ 42% Power Loss Reduced

WHEEL BALANCER PRO

Art No. 9501006296

- CE Approved
- 1 Phase 220v 50Hz
- Weight: 126 kg
- Balancing speed: 200rpm
- Balancing accuracy: $\pm 1g$
- Measuring time: 8s
- 6 Balancing modes
- Split and hidden weights solution
- Opt function
- Max wheel weight: 65kg
- Rim diameter: 10" - 24"
- Rim width: 1.5" - 20"

WHEEL BALANCER WITH DISPLAY, AUTOMATIC BRAKE & LASER



17" LED Display



Tool handle + Tool Box



Automatic distance, diameter & width measuring




6 Balancing Modes

- Alu-S
- Static
- Alu-1
- Alu-2
- Alu-3
- Normal



Automatic Disc Brake

Stop & Lock shaft to automatically stops & locks the tyre to find the imbalanced position

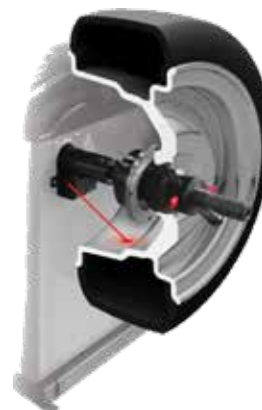

Laser Pointer

Automatically points out the imbalanced position with a laser

TRUCK WHEEL BALANCER AUTO

Art No. 9501006297

- CE Approved
- 1 Phase 220v 50Hz
- Weight: 263 kg
- Balancing speed: 200rpm
- Balancing accuracy: $\pm 5g$
- Measuring time: 8s
- 5 Balancing modes
- Noise level: <70 dB
- Max wheel weight: 150kg
- Rim diameter: 10" - 24"
- Rim width: 1.5" - 20"

**WHEEL BALANCER FOR CARS,
TRUCKS & BUS WITH LIFT PLATFORM**



High precision main shaft ensures highest accuracy



Self-Calibration and automatic diagnosis functions



Pneumatic lifting platform for large heavy tyres



Toggle button for up & down



Forward & reverse trolley



5 Balancing Modes

- Normal
- Static
- Alu-1
- Alu-2
- Alu-3



TYRE CHANGER & WHEEL BALANCER

Wuerth Malaysia Sdn Bhd
Lot 806, Jalan Subang 5,
Taman Perindustrian Subang,
47600, Selangor.
T +60 3 8021 0190
F +60 3 8021 0198
inquiry@wuerth.com.my
www.wuerth.my

We reserve the right, at any time without prior notice or notice, to make any product changes that we feel necessary. Images may be for illustration purposes only and that might differ in appearance from the delivered goods. All products and items are whilst stock last. We reserve the right for misprints where we assume no liability. The General Terms and Conditions apply.



DOWNLOAD OUR WÜRTH E-SHOP APP NOW!



AVAILABLE ON BOTH APPLE APP STORE AND GOOGLE PLAY STORE