



PRODUCT ZOOM #19

Valid from 1 February 2022 to
28 February 2022

**#READY
FOR WORK**





ASSEMBLY GLOVE SOFT

Special protective gloves that are also touch screen compatible. No more hassel of removing your gloves to use your smart phone.

Size	Art No.
8	0899400731
9	0899400732



WORKING GLOVE COW SPLIT LEATHER

Size: 10

Robust work glove made from split cow leather

Art No. 0899400295



TOP ALL-COWHIDE LEATHER GLOVE

Size: 10

Rugged work glove made from high-quality full-grain cowhide.

Art. No. 0899402



BUY 2 PACKS
(100 PCS)
FREE 1 PACK
(50PCS)

DISPOSABLE NITRILE GRIP GLOVE 50 PCS

Size: M

Unique, diamond texture for optimal grip

Art No. 0899470121



PROTECTIVE GLOVE BLACK MECHANIC

Size: 8

Universal glove with good mechanical resistance and special surface texturing for excellent dry and wet grip

Art No. 0899405028



PROTECTIVE GLOVE BASEFLEX

Size: 9

High-quality nitrile coating on a rugged, seamless round-knit nylon backing fabric

Art. No. 0899401509



**RECHARGEABLE LED HEAD LAMP
ERGOPOWER SENSOR**

Strong light beam headlamp enables hands free professional operation of tools and machines thanks to sensor switch and high capacity battery

Art No. 0827809635



EAR DEFENDER A812

Foldable earmuff, sock resistant, durable
Comfort and fit
Slide and swivel cup enhances
Soft foam ear cushions

Art No. 0899300361

**COMFORTABLE EARMUFFS FOR USE IN
NOISY ENVIRONMENTS UP TO 31.3DB**



HARD HAT SH 2000-S

Comfortable hard hat with internal dial adjustment
6-point fabric lining and individually controlled ventilation openings on the front and back

Art No. 0899200243



SAFETY GLASSES PREMIUM

Wrap around design with adjustable side arms.
Scratch and impact resistant, polycarbonate lens.
Anti-fog coating.

Colour	Art No.
Clear	0899103110
Grey	0899103111



SAFETY GLASSES STANDARD

All-round design for maximum side protection.
First-class polycarbonate lenses and polycarbonate frame
Scratch-resistant and impact-resistant

Colour	Art No.
Clear	0899103120
Yellow	0899103122



SAFETY GOGGLES CASTOR

Full-vision goggles with supple frame
Adjustable head strap for a perfect fit
Indirect ventilation system guarantees protection against drops and splashes inside

Art No. 0899107016

**FULL-VISION ADJUSTABLE
GOGGLES WITH SUPPLE FRAME**



STAND FOR WORK LIGHT

Universal stand mainly used for hanging working lights but can be used to hang other items as well

Height: 83 - 143 cm

Art. No. 09811403



BLUE, ADHESIVE-FREE PLASTER ELAST LATEX-FREE

Adhesive-free plaster for all wounds and cuts, optimum hold even in food-processing areas

Length: 450 cm

Width: 6 cm


Art No. 089951225



RIBBED PVC PLASTER TAPE 50MM X 33M

Masking tape for protecting smooth surfaces during painting, plastering and varnishing both indoors and outdoors.

Art No. 099240150

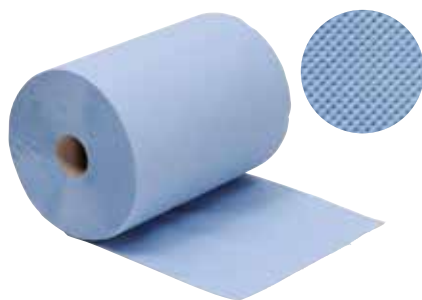

CLEANING PAPER ECOLINE

1000 SHEETS

The all-rounder for the most common cleaning tasks, Highly absorbent

Number of plies: 3 PCS

Sheet length x sheet width: 36 x 38 cm

Length of roll: 360 m

Art No. 0899800823



CLEANING PAPER STAND

Floor stand for cleaning paper rolls with wheels and waste bag holder

Art No. 0899800606



***Plastic bag not included**

CLEANING PAPER STAND PACKAGE

1 x CLEANING PAPER STAND

(Art No. 0899800606)

1 x CLEANING PAPER ECOLINE (Art No. 0899800823)

Art. No. 0988008416



POCKET TAPE MEASURE MAGNETIC 2-COMPONENT PT18

High-quality pocket tape measure with shock-proof 2-component plastic housing, double-sided painted tape and magnetic end hook.

Length	Art No.
5 M	071465 035
8 M	071465 038

BUSHING TOOL

With SDS-MAX mounting shank

Length: 240 mm

Width: 41 mm

Tool holding device: Suitable for SDS-max

Art No. 0993647001

SUBMERSIBLE PUMP CLASSIC

Flat suction pump for extracting water up to 2 mm deep

Max. feed quantity: 70 l/min

Max. delivery height: 6 m

Nominal voltage: 230 V/AC

Nominal current: 1 A

Art No. 099370270



DIGITAL MULTIMETER TRUE

RMS 6000 COUNTS

Compact and simple use for safe and reliable measurements, suitable for troubleshooting electronic and electrical systems.

Art No. 071553 371

DIGITAL MULTIMETER PROFESSIONAL

Versatile TRMS multimeter, provides the most important functions for daily use in skilled trades, business and industry. For maintenance, installation, service. Robust due to shock-proof cover.

Art No. 071558 550



T-HANDLE HEXAGON SOCKET SCREWDRIVER

For hexagon head screws

Blade: Round blade, chrome-plated

Inner bore for protruding threaded shafts

Standard: DIN 3125

Tip: DIN 475/2

Width across flats (mm)	Art No.
8	061312208
10	061312210
11	061312211
12	061312212
13	061312213
14	061312214



SCREWDRIVER WITH FLEXIBLE SHAFT

For hexagon head screws

Width across flats: 7 mm

Blade length: 150 mm

Handle lengthj/width: 106/35mm

Art No. 061328607



T-HANDLE HEXAGON SOCKET BALL HEAD SET 6 PCS

Size: 2.5mm, 3mm, 4mm, 5mm, 6mm, 8mm

Art No. 06139136

T-HANDLE TORX SOCKET SET 7 PCS

7 Pieces - TX 10; TX 15; TX 20; TX 25; TX 30; TX 40; TX 45

Art No. 06139147



SOCKET WRENCH SET 1/4 INCH AND 1/2 INCH DUST-PROTECTED 59 PCS

Extensive assortment of 1/4 inch and 1/2 inch socket wrench inserts including new reversible ratchet in elegant satin finish

Art No. 096509075





TOOL CASE 32 PCS

Art No. 5964502002

- Content:
- 2x Electrical insulating tape 0,15 x 15 x 10 mm
 - 1x Two-pin voltage tester Multi-Tester Pro II LEDO
 - 1x Safety glasses CEPHEUS®
 - 1x Voltage protective glove
 - 3x Insulating caps 3.5 kV
 - 1x VDE snipe nose pliers
 - 1x VDE combination pliers
 - 1x VDE screwdriver PH recessed head 1, head 2
 - 1x VDE screwdriver Flat slotted 0,6 x 3,5, 1,0 x 5,5
 - 1x VDE 3/8 inch ratchet 200 mm
 - 1x VDE 3/8 inch extension 150 mm
 - 1x 3/8-inch VDE socket wrench lang 8, 10, 12 mm
 - 1x 3/8 inch VDE socket wrench Hexagon socket 4 mm
 - 1x 3/8 inch VDE socket wrench Hexagon 8, 10, 12, 13, 14, 17 mm
 - 1x Box wrench VDE 8, 10, 12, 13, 14, 17 mm



RIVET NUTS WITH SMALL COUNTERSUNK HEAD, ASSORTMENT 506 PCS

Art No. 5964091700

- Content:
- 1 x Rivet nut pliers
 - 1 x Thread mandrel M3 / M4 / M5 / M6 / M8
 - 100 x Rivet nut, small countersunk head M3/ M4 / M5 / M6 / M8



SEALING RING ASSORTMENT 1350 PCS

Art No. 5964046000

- Content:
- 100x Sealing ring, 6 x 10 mm
 - 100x Sealing ring, 8 x 12 mm
 - 100x Sealing ring, 8 x 14 mm
 - 100x Sealing ring, 10 x 14 mm
 - 100x Sealing ring, 10 x 16 mm
 - 100x Sealing ring, 12 x 16 mm
 - 100x Sealing ring, 12 x 18 mm
 - 100x Sealing ring, 14 x 18 mm
 - 100x Sealing ring, 14 x 20 mm
 - 100x Sealing ring, 16 x 22 mm
 - 50x Sealing ring, 18 x 24 mm
 - 50x Sealing ring, 20 x 26 mm
 - 50x Sealing ring, 22 x 27 mm
 - 50x Sealing ring, 24 x 30 mm
 - 50x Sealing ring, 26 x 32 mm
 - 50x Sealing ring, 28 x 34 mm
 - 25x Sealing ring, 30 x 36 mm
 - 25x Sealing ring, 32 x 38 mm



CLAMPING JAW HOSE CLAMP ASSORTMENT 243 PCS

Art No. 5964054000

- Content:
- 25x Hose clamp with clamping jaw 7 mm x 8 mm
 - 25x Hose clamp with clamping jaw 9 mm x 9 mm
 - 25x Hose clamp with clamping jaw 9 mm x 10 mm
 - 25x Hose clamp with clamping jaw 9 mm x 12 mm
 - 25x Hose clamp with clamping jaw 9 mm x 13 mm
 - 25x Hose clamp with clamping jaw 9 mm x 14 mm
 - 25x Hose clamp with clamping jaw 9 mm x 15 mm
 - 25x Hose clamp with clamping jaw 9 mm x 16 mm
 - 25x Hose clamp with clamping jaw 12 mm x 18 mm
 - 18x Hose clamp with clamping jaw 15 mm x 25 mm

TWIST DRILL BITS HSS DIN 338 TYPE RN TIN HEAD

TiN head coated steel precision drill for general, broad applications in steel up to 850 N/mm² strength and cast iron.



Diameter (mm)	Length (mm)	Chip Flute Length (mm)	Art. No.
1 mm	34 mm	12 mm	0624020100
1.5 mm	40 mm	18 mm	0624020150
2 mm	49 mm	24 mm	0624020200
2.5 mm	57 mm	30 mm	0624020250
2.8 mm	61 mm	33 mm	0624020280
3 mm	61 mm	33 mm	0624020300
3.1 mm	65 mm	36 mm	0624020310
3.2 mm	65 mm	36 mm	0624020320
3.3 mm	65 mm	36 mm	0624020330
3.5 mm	70 mm	39 mm	0624020350
3.8 mm	75 mm	43 mm	0624020380
4 mm	75 mm	43 mm	0624020400
4.1 mm	75 mm	43 mm	0624020410
4.2 mm	75 mm	43 mm	0624020420
4.4 mm	80 mm	47 mm	0624020440
4.5 mm	80 mm	47 mm	0624020450
4.8 mm	86 mm	52 mm	0624020480
4.9 mm	86 mm	52 mm	0624020490
5 mm	86 mm	52 mm	0624020500
5.1 mm	86 mm	52 mm	0624020510
5.2 mm	86 mm	52 mm	0624020520
5.3 mm	86 mm	52 mm	0624020530
5.5 mm	93 mm	57 mm	0624020550
5.6 mm	93 mm	57 mm	0624020560
5.8 mm	93 mm	57 mm	0624020580
6 mm	93 mm	57 mm	0624020600
6.1 mm	101 mm	63 mm	0624020610
6.2 mm	101 mm	63 mm	0624020620
6.4 mm	101 mm	63 mm	0624020640
6.5 mm	101 mm	63 mm	0624020650
6.8 mm	109 mm	69 mm	0624020680

Material to be processed: Steel

Standard / drilling depth: DIN 338 / 5xD

Shank style: Cylindrical

Surface: TiN

Cutting material: HSS

Type: RN

Angle of the tip: 130 Degree



Diameter (mm)	Length (mm)	Chip Flute Length (mm)	Art. No.
7 mm	109 mm	69 mm	0624 020 700
7.5 mm	109 mm	69 mm	0624 020 750
8 mm	117 mm	75 mm	0624 020 800
8.5 mm	117 mm	75 mm	0624 020 850
9 mm	125 mm	81 mm	0624 020 900
9.5 mm	125 mm	81 mm	0624 020 950
10 mm	133 mm	87 mm	0624 021 000
10.2 mm	133 mm	87 mm	0624 021 020
10.5 mm	133 mm	87 mm	0624 021 050
11.1 mm	142 mm	94 mm	0624 021 110
11.5 mm	142 mm	94 mm	0624 021 150
12 mm	151 mm	101 mm	0624 021 200
12.5 mm	151 mm	101 mm	0624 021 250
13 mm	151 mm	101 mm	0624 021 300
14 mm	160 mm	108 mm	0624 021 400
15.5 mm	178 mm	120 mm	0624 021 550
16 mm	178 mm	120 mm	0624 021 600
17.5 mm	191 mm	130 mm	0624 021 750
18 mm	191 mm	130 mm	0624 021 800



The TiN coating increase the heat resistance up to 600°, which provides 3 times more tool life in comparison with a non-coated drill bit

LEFTHAND DRILL BIT HSCO DIN 1897 TYPE LN 118°

TIN (Titan-Nitrid) coated

Precise drilling

Short design provides for quick drilling

Self-centering


Long tool life



Diameter (mm)	Length (mm)	Chip Flute Length (mm)	Art. No.
3.2	52	20	0626 920 320
4.8	62	26	0626 920 480
6.4	71	30	0626 920 640
8.0	80	40	0626 920 800
8.7	85	41	0626 920 870



Left handed drill bits that are specially designed for removing screws and bolts that have already been jammed.



CYLINDER SAW, HSS BI-METAL LONGLIFE & SPEED HSCO8

Cutting depth: 38mm

High concentricity and side stroke accuracy

Robust base plate with more threads

Very quiet and low-vibration operation to a cutting depth of 38 mm



Combi vario toothing made from M42 bi-metal (8% cobalt)

Hole Dia. (mm)	Art. No.
16	0632900016
19	0632900019
20	0632900020
21	0632900021
22	0632900022
24	0632900024
25	0632900025
27	0632900027
29	0632900029
30	0632900030
32	0632900032
35	0632900035
38	0632900038
40	0632900040

Hole Dia. (mm)	Art. No.
41	0632900041
44	0632900044
51	0632900051
54	0632900054
57	0632900057
60	0632900060
64	0632900064
67	0632900067
68	0632900068
73	0632900073
76	0632900076



EXTREMELY FAST SAWING PROGRESS WITH MINIMAL EFFORT FROM NEWLY-DEVELOPED TOOTH SHAPE



CORE DRILL BIT HSS


Cutting depth: 30mm

Total Length: 63 mm


Standard core drill bits made of cemented carbide for drilling large through holes up to Ø 50 mm with mobile magnetic or stationary drills in cutting depths of 30 mm and 50 mm in conventional steels up to 850 N/mm², wood and non-ferrous metals, such as aluminium, aluminium alloys and plastic

Hole Dia. (mm)	Art. No.
12	0630 930 120
13	0630 930 130
14	0630 930 140
16	0630 930 160
17	0630 930 170
19	0630 930 190
21	0630 930 210
22	0630 930 220
23	0630 930 230
24	0630 930 240
25	0630 930 250

Hole Dia. (mm)	Art. No.
26	0630 930 260
27	0630 930 270
28	0630 930 280
29	0630 930 290
30	0630 930 300
31	0630 930 310
32	0630 930 320
35	0630 930 350
40	0630 930 400
50	0630 930 500



WARNING MARKING ADHESIVE TAPE

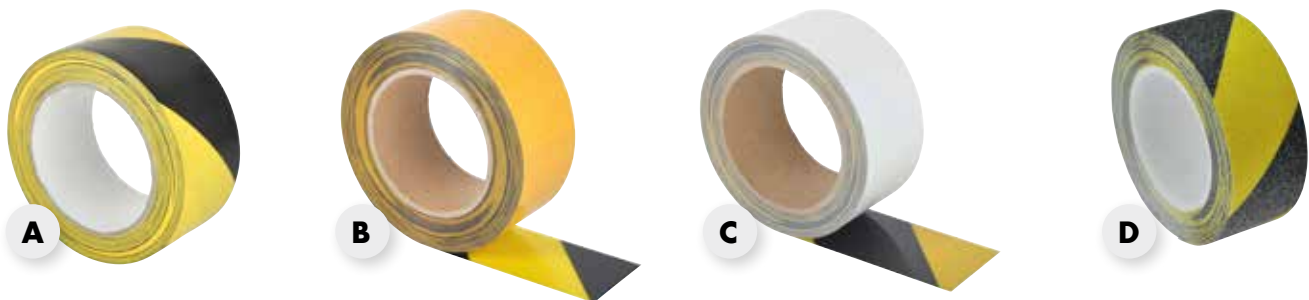

Type	Description	Length (M)	Width (mm)	Art. No.
A RESIDUE FREE	Residue-free warning tape with high bonding strength	33	50	081244 660
B HEAVY DUTY	Warning tape with extremely high tear resistance. Can be driven over without any damages	10	50	081244 664
C FOR FOOD AREAS & HYGIENE ZONES	Special warning tape without any chemicals, which makes it safe for food and hygiene sensitive areas	15	50	081244 668
D NON-SLIP	Special warning tape with non-slip texture. Perfect for stairs and high slip danger areas.	6	50	081244 672



**RUST REMOVER ROST-OFF PLUS
300 ML**

Contains liquid, highly effective, organic molybdenum compound OMC²

Art No. 0890200

**ADHESIVE LUBRICANT HHS®
FOODSTUFFS 500 ML**

Waterproof, synthetic adhesive lubricant with penetrating properties

Can be used in areas in which food is processed or stored

Art No. 08931076

**TAP FOR 20L & 60L PLASTIC
CANISTER**

Art. no. 089130203



NEUTRAL SILICONE PERFECT 310 ML

Low-emission, highly adhesive and versatile sealant for expansion joints in indoor and outdoor areas.


Colour	Art. No
Clear	08925101
White	08925102
Concrete Grey	08925104

SILICONE ACETATE BATHROOM UNIT 310 ML

Suitable for sanitary applications
Excellent adhesion to tiles

Colour	Art. No
Clear	08925601
Concrete Grey	08925605
Tile White	08925608

FIXING ANCHOR W-FA

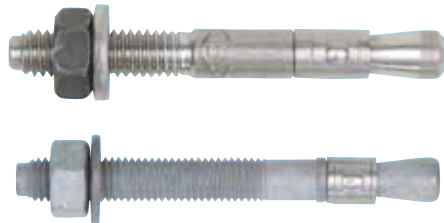

Individual attachment:
Uncracked concrete

W-FA/A4
Stainless Steel


W-FA/F
Hot Galvanized Steel

Areas of Application

- Can be used for medium to heavy loads
- Suitable for fastening: Metal structures, metal profiles, brackets, foot plates, supports, cable conduits, piping, wooden structures, beams, purlins, etc
- With European Technical Approval, the anchor may be used in reinforced or non-reinforced standard concrete of a strength class of at least C20/25 and at most C50/60 in accordance with EN 206-1:2000-12
- Can be used in < C20/25 concrete and pressure-resistant natural stone (without approval)
- The anchor may only be used for anchoring under a predominantly static or quasi-static (e. g. facade, railing) load
- Individual fastening: Anchoring with European Technical Approval in uncracked concrete (concrete pressure zone)
- W-FA/S and W-FA/F may only be used under the conditions of dry inside rooms

Advantages

- High load-bearing capacities, small axial and edge spacing
- Time-saving pass-through mounting
- Two anchoring depths → Versatile in use for medium- and heavy-load applications
- Can be loaded immediately - No wait times
- Mounting reliability ensured through the application of the prescribed torques when anchoring

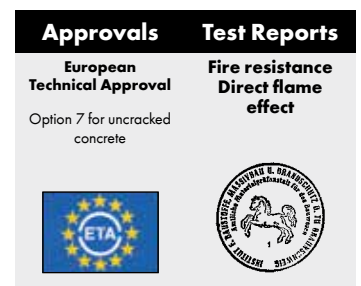

FIXING ANCHOR W-FA/A4

Anchor dia. [mm]	Fastening height $t_{fix} / t_{fix,red}$ [mm]	Total length l [mm]	Effective anchoring depth $h_{ef} / h_{ef,red}$ [mm]	Thread [dia. x length]	Art. No.
M8	30/39	95	44/35	M8 x 60	0904 411 087
M10	10/16	85	48/42	M10 x 40	0904 411 002
M10	15/21	90	48/42	M10 x 45	0904 411 003
M12	30/45	125	65/50	M12 x 80	0904 411 206



FIXING ANCHOR W-FA/F

Anchor dia. [mm]	Fastening height $t_{fix} / t_{fix,red}$ [mm]	Total length l [mm]	Effective anchoring depth $h_{ef} / h_{ef,red}$ [mm]	Thread [dia. x length]	Art. No.
M8	15 / 24	80	44 / 35	M8 x 45	5932 908 080
M8	30 / 39	95	44 / 35	M8 x 60	5932 908 095
M10	15 / 21	90	48 / 42	M10 x 45	5932 910 090
M12	30 / 45	125	65 / 50	M12 x 80	5932 912 125
M16	30 / 48	150	82 / 64	M16 x 90	5932 916 150

FIXING ANCHOR W-FAZ/S



Individual attachment:

Cracked and uncracked concrete

W-FAZ/S, galvanized steel

Areas of Application

- Individual attachment with approval
- Standard concrete C20/25 to C50/60 (cracked and non-cracked concrete, seismic performance category C1 and C2)
- For attachment of metal structures, metal profiles, brackets, base plates, supports, cable conduits, pipes, railings, wooden structures, roof beams etc.
- Individual attachment without approval
- For use in concrete < C20/25 and pressure-resistant natural stone
- W-FAZ/S may only be used in dry indoor room conditions

Advantages

- High loads, small axis and edge clearance
- Immediate load-bearing capacity - no waiting times
- Time-saving push-through installation
- Reduced anchor depth
- Minimised drilling, time-saving
- Versatile applications

Approvals					Test Reports
European Technical Approval Option 1 for cracked and uncracked concrete	European Technical Approval Multiple attachment of non-load-bearing systems	Fire resistance Technical Report TR 020 R30 - R120	M8 - M20	Seismic C2	Fire resistance Direct flame effect

Anchor dia.	Standard anchoring depth			Reduced anchoring depth			Length [mm]	Wrench size [mm]	Art. No.
	Attach. height t_{fix} [mm]	Drill hole dia. x depth [mm]	Effective anchoring depth h_{ef} [mm]	Attach. height t_{fix} [mm]	Drill hole dia. x depth [mm]	Effective anchoring depth h_{ef} [mm]			
M10	10	10 x 75	60	30	10 x 55	40	90	17	5928 210 010
	20			100			5928 210 020		
	30			110			5928 210 030		
M12	-	12 x 90	70	10	12 x 70	50	85	19	5928 252 010
	15			110			5928 212 015		
	20			115			5928 212 020		
	30			125			5928 212 030		
	50			145			5928 212 050		
	65			160			5928 212 065		
M16	15	16 x 110	85	35	16 x 90	65	135	24	5928 216 015
	25			145			5928 216 025		
	50			170			5928 216 050		
	80			200			5928 216 080		
M20	30	20 x 125	100	-	-	-	165	30	5928 220 030
	60			-			195		5928 220 060

FIXING ANCHOR W-F/S



Individual attachment:

Uncracked concrete

W-F/S
Galvanised steel

Areas of Application

- For use in medium and heavy duty applications
- Suitable for anchoring of metal structures, metal profiles, consoles, footplates, supports, cable trays, pipelines, railings, wood structures, beams, purlins, etc
- The anchor may be used in concrete with strength < C20/25 and in some types of masonry units (for example pressure-resistant natural stone)
- The anchor is to be used only for anchorages subject to static (e.g. gravity load) or quasi-static loading (r.g. slowly varying live loads)
- Single fixing: Anchoring in uncracked concrete (concrete compression zone)
- W-F is suitable for dry interior spac

Advantages

- Time-saving push-through installation
- Immediate load-bearing capacity – no waiting
- Torque-controlled expanding galvanised steel anchor
- Two anchorage depths – wide range of application

Approvals

European
Technical Approval

Option 7 for uncracked
concrete



Anchor dia. [mm]	Fastening height $t_{fix} / t_{fix,red}$ [mm]	Total length l [mm]	Effective anchoring depth $h_{ef} / h_{ef,red}$ [mm]	Thread [dia. x length]	Art. No.
M8	5/18	75	48/35	38.5	5933 008 075
M10	10/23	90	55/42	49	5933 010 090
	20/33	100		59	5933 010 100
	40/53	120		79	5933 010 120
M12	8/23	100	65/50	48	5933 012 100
	18/23	110		58	5933 012 110
	28/43	120		68	5933 012 120
	48/63	140		88	5933 012 140
M16	3	125	84	60	5933 016 125
	23	145		80	5933 016 145
M20	23	170	103	-	5933 020 170

**FREE BMH 40-BL (Art. No 07025541)
WHEN YOU PURCHASE ABOVE RM5000
WORTH OF ANY ANCHORS**



FREE

E-SHOP PROMOTION

Only valid on the Wuerth Online Shop



PROMO CODE
BLOWPEN

PNEUMATIC BLOW-OFF PEN
Art No. 071493 01
MINIMUM PURCHASE
RM200



PROMO CODE
BIT12

BIT BOX 12 PCS
Art No. 0614250012
MINIMUM PURCHASE
RM300



PROMO CODE
PAINTPLAST

PLASTIC PAINT PLAST PT® 75 ML
Art No. 08932801
MINIMUM PURCHASE
RM500

SHOP PROMOTION

No more waiting.

Get your item(s) on the spot at our store today.

OVER 3000++ PRODUCTS IN STORE



Google Maps



Waze



1C CUTTER KNIFE WITH SLIDER
Art No. 071566 210



FREE



MINIMUM PURCHASE
RM100

PACKET TAPE MEASURE, 3M
Art No. 071464 470



FREE



MINIMUM PURCHASE
RM300

PERSONAL HYGIENE KIT
21 PCS
Art No. 089921003



FREE



MINIMUM PURCHASE
RM500



**DOWNLOAD OUR
WÜRTH E-SHOP APP
NOW!**



AVAILABLE ON BOTH APPLE APP STORE AND GOOGLE PLAY STORE

BLOW-OUT PUMP

Art No. 0903990001



MINIMUM PURCHASE
RM500

ADIDAS DFB TRIKOT HOME SIZE L

Art No. 09901204



MINIMUM PURCHASE
RM800

ANGLE GRINDER EWS 7-100-CLASSIC

Art No. 5717018130



MINIMUM PURCHASE
RM1500

3/8 INCH SOCKET WRENCH

ASSORTMENT 19 PCS

Art No. 096512 19



MINIMUM PURCHASE
RM2000

Free item for any purchase of products from this promo with a minimum value



**#READY
FOR WORK**

PRODUCT ZOOM #19

Wuerth Malaysia Sdn Bhd
Lot 35, Jalan Delima 1/3,
Subang Hi-Tech Industrial Park,
40000, Shah Alam, Selangor.
T +603 58888 420
M +6012 345 3493
inquiry@wuerth.com.my
www.wuerth.my

We reserve the right, at any time without prior notice or notice, to make any product changes that we feel necessary. Images may be for illustration purposes only and that might differ in appearance from the delivered goods. All products and items are whilst stock last. We reserve the right for misprints where we assume no liability. The General Terms and Conditions apply.



@wuerthmalaysia